

INDUSTRIES SERVED



GOVERNMENT



COMMERCIAL



INDUSTRIAL



AGRICULTURAL



RESIDENTIAL

OUR CUSTOMERS:

GOVERNMENT

- Pentagon
- Army
- Navy
- Air Force
- Marines
- Coast Guard

COMMERCIAL

- Notch Travel Centre
- Olympic Skating
- O'Neill Coffee
- Jones Performance
- Family Craft
- Tri-City Speedway

INDUSTRIAL

- Solar Atmospheres
- Champion Carrier
- Lane Metals
- Brownlee Lumber
- Farben Painting
- Vogel Recycling/Tri-County Industries

PRE-ENGINEERED METAL BUILDING SYSTEMS




SHENANGO STEEL BUILDINGS BENEFITS:

- STRONGER DESIGNS | FEWER COMPONENTS | FEWER FIELD ASSEMBLIES/MODIFICATIONS
 GREATER FLEXIBILITY | FASTER START-FINISH TIMES | REDUCED LABOR-HOURS

33 Carbaugh Street
 West Middlesex, PA 16159-4103
 800.548.0625
 info@shenangosteelbuildings.com
 www.shenangosteelbuildings.com



STANDARD BUILDING SHAPES

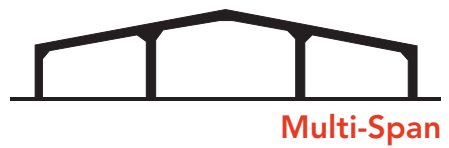


Custom Designs/Shapes

Various Roofing & Siding Colors

ADDITIONAL PRODUCTS

- Roofing
- Retro-Roofing
- Siding
- Retro-Siding
- Universal Building Frames
- Shen-O-Deck
Converts overhead space to productive floor space for a fraction of the cost of new construction

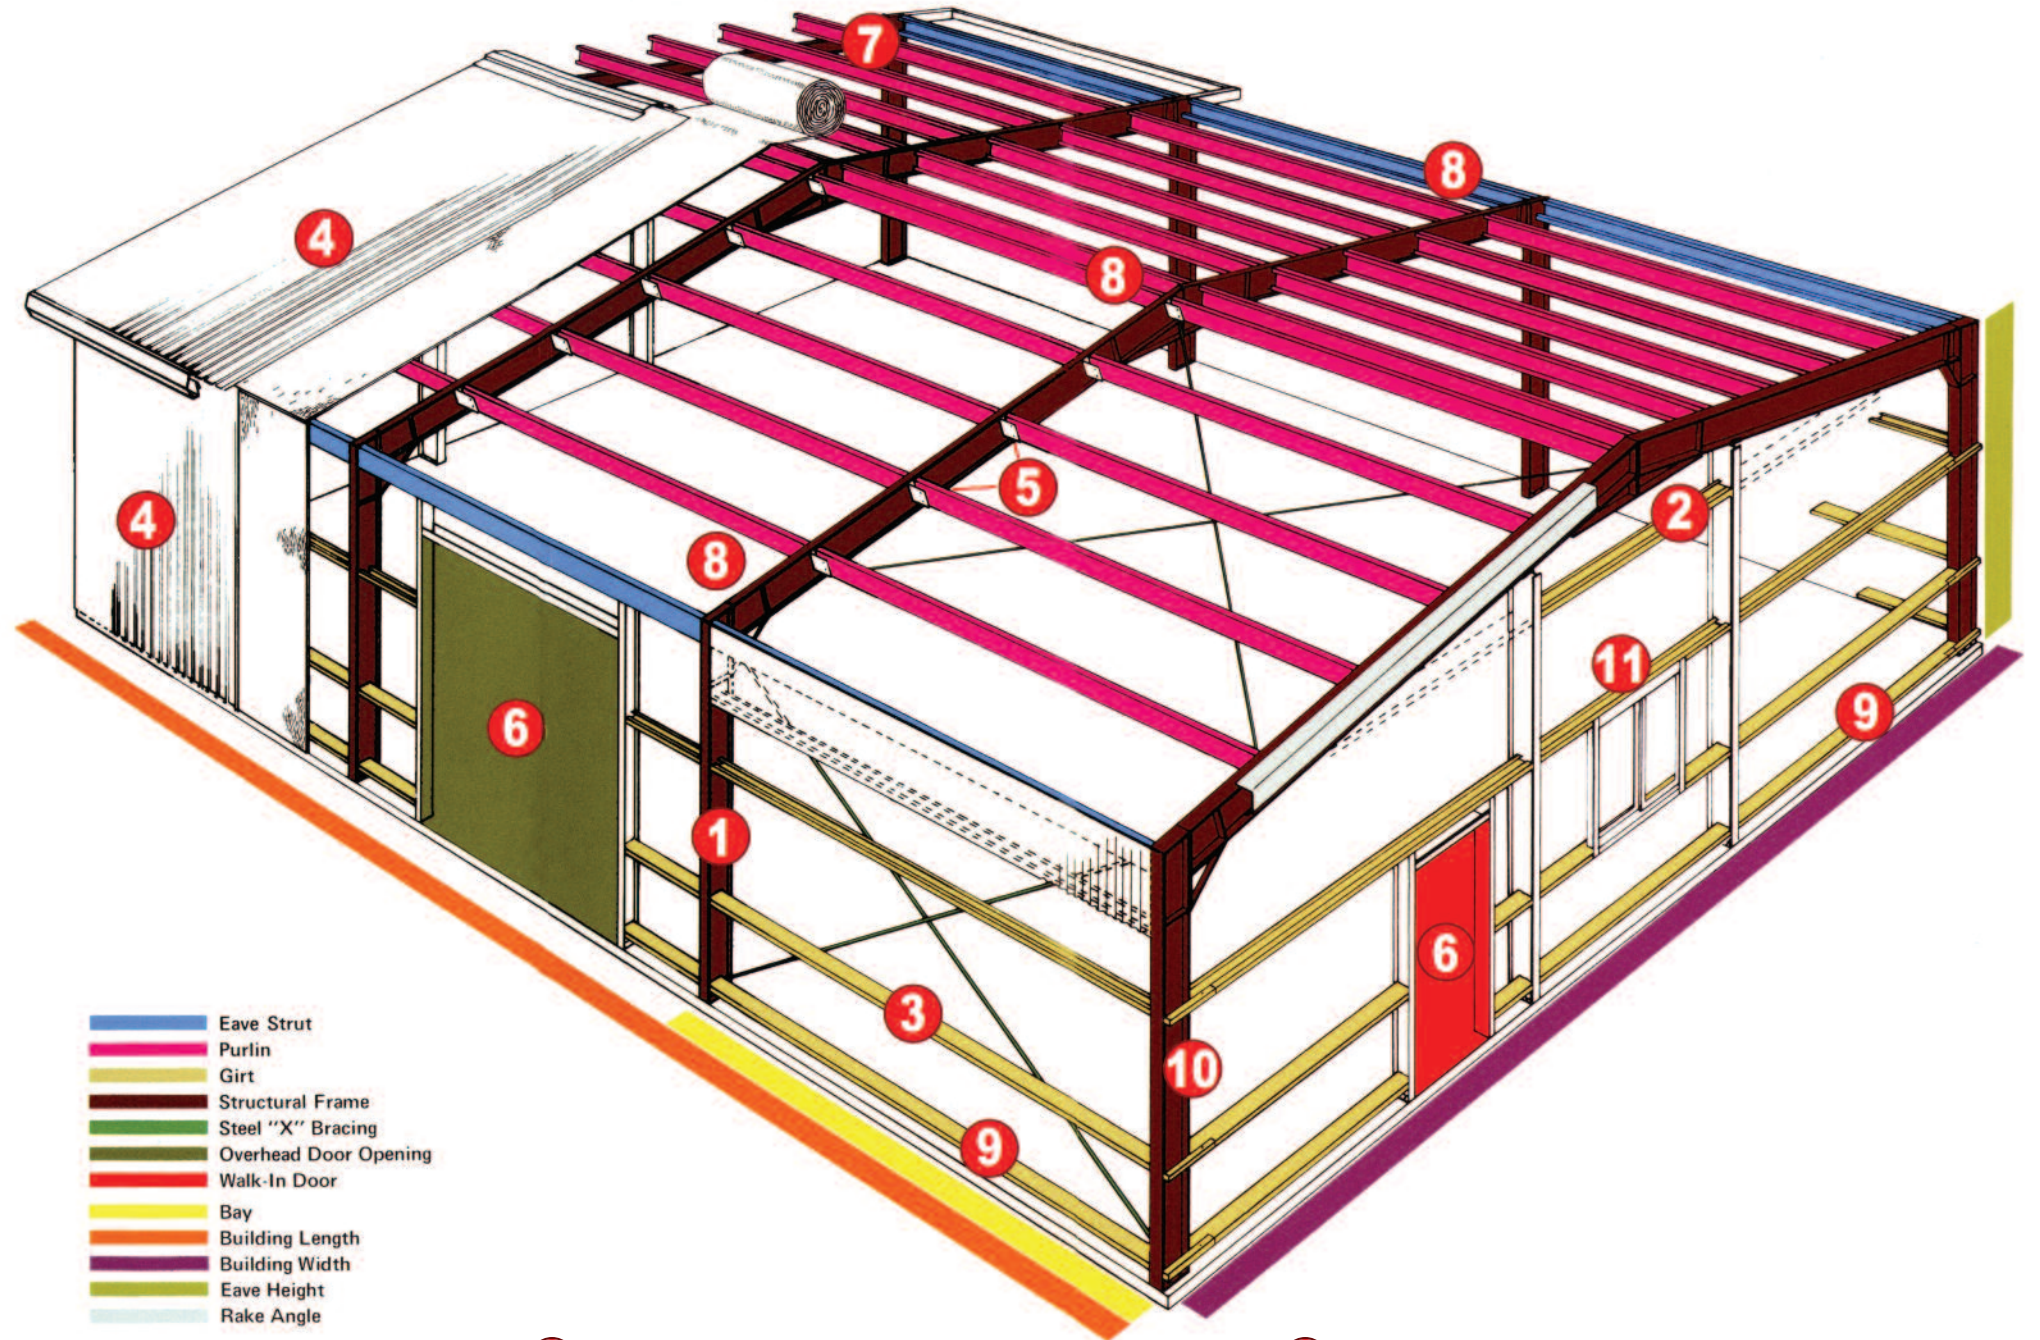

FEATURES OF SHENANGO STEEL BUILDINGS:

- Anchor bolts
- Standard with galvanized steel purlins, girts, subframing for doors, windows & overhead doors
- Self-drilling & self-tapping sheet metals screws
- Flange of purlins, girts & frames conceal unsightly wiring and plumbing
- Drawings to indicate the proper assembly of building parts
- Accessory items such as doors, windows, light transmission panels, ventilators & more

- 1 Rafters and columns are not tapered
- 2 Girts fitted inside the column instead of outside the column
- 3 Sidewall girt at waist level is standard
- 4 Wall and roof steel panels are roll formed and cut to exact specifications
- 5 Roof purlin and sidewall girt clips are welded into position at our factory
- 6 Doors and overhead doors can be located anywhere
- 7 Overhangs are built in, not hung on
- 8 Only three connecting points per clear span frame (Industry standard is five)
- 9 First girt installed 6 inches above the floor (Industry standard is 7 to 8 feet)
- 10 Endwall frames identical to intermediate frames
- 11 Door and window openings are framed and reinforced